





R50 SPECIFICATIONS Teeth, Adapters, Accessories


TS C-rex 001 EN




UA




WC




AE



PE



LP



LT


Typical machine weight - Excavator 50-80 MT
Maximum breakout force in HD/XHD 400 kN

Typical machine weight - Loader 80-100 MT
Maximum breakout force in HD/XHD 720 kN


Type	Part. no			A mm	B mm	C mm	D mm	E mm	F mm	G bevel	Weight kg
UA	R50UA70			72	583	171	362	233	190	30°	51,6
UA	R50UA75			77	583	171	359	230	190	30°	51,3
UA	R50UA80			82	583	171	356	227	190	30°	50,7
WC	R50WC			184	82	142					3,9
AE	R50AE			448	186	32	171	178			33,4
PE	R50PE			454	186	20	87	178			28,4
LP	R50LP			40	146						1,0
LT	R50LT			422	91	125					1,1




MECHANICAL SHROUDS SPECIFICATIONS 70 mm, 75 mm

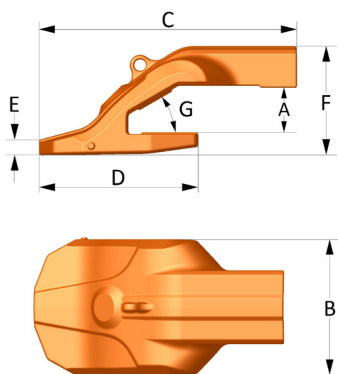


MSCE 

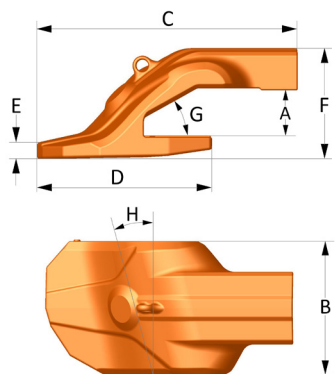



MSLE 

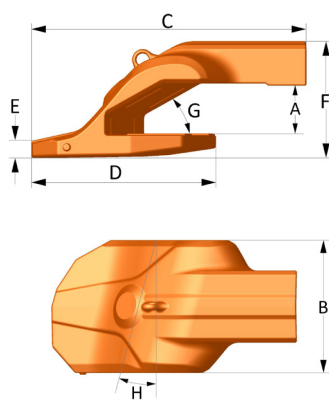


MSRE 









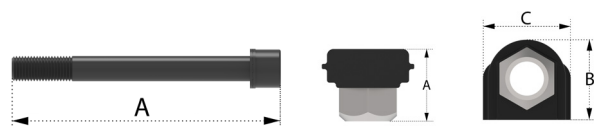

















MSP 



WSR 



SL, Washer, Bolt 

Type	Part. no			Weight kg	A mm	B mm	C mm	D mm	E mm	F mm	G °	H °
MSCE70	500401			40,0	72	240	445	275	28	189	30	0
MSLE70	500402			39,0	72	240	445	275	29	189	30	15
MSRE70	500403			39,0	72	240	445	275	29	189	30	15
MSCE75	500404			40,0	77	240	425	275	28	189	30	0
MSLE75	500405			39,0	77	240	425	275	29	189	30	15
MSRE75	500406			39,0	77	240	425	275	29	189	30	15
MSP75	500423			4,2	108	130	72	49				
WSR75	500417			2,2	95	53	90					
SL	500302			0,3	48	54	58					
Washer	500355											
Bolt	500354			0,9	254							

Combi Wear Parts AB
 Hantverkargatan 3, Box 205
 SE-681 24 Kristinehamn, Sweden
 Tel: +46 550 410 550
 combiwearparts.com